

# HW93733 20 Ton Truck Jack

Made in 

Uses  
Standard Shop Air!  
[110-175 PSI pressure]

## HW93265 Saddle Extension Kit

(Optional, for use only on HW93733)

Adds 1/2", 2-3/8", or 4"  
to low pick-up heights

Optional adapters provide  
added height



Pressure relief valve  
prevents overloading

Rapid two-speed air hydraulic  
action quickly advances ram to load

Specially coated ram prevents  
rust and extends jack life

Low height allows lifting  
from axle or suspension

Large 8"  
rubber wheels

| Model   | Capacity | Minimum Height | Maximum Height | Power Raise | Handle Length | Base Size     | Extension Screw | Operating Pressure | G.W.    |
|---------|----------|----------------|----------------|-------------|---------------|---------------|-----------------|--------------------|---------|
| HW93733 | 20 Ton   | 9-1/2"         | 20"            | 5"          | 52-1/2"       | 20-1/2" x 13" | 5-1/2"          | 110-140 PSI        | 97 Lbs. |

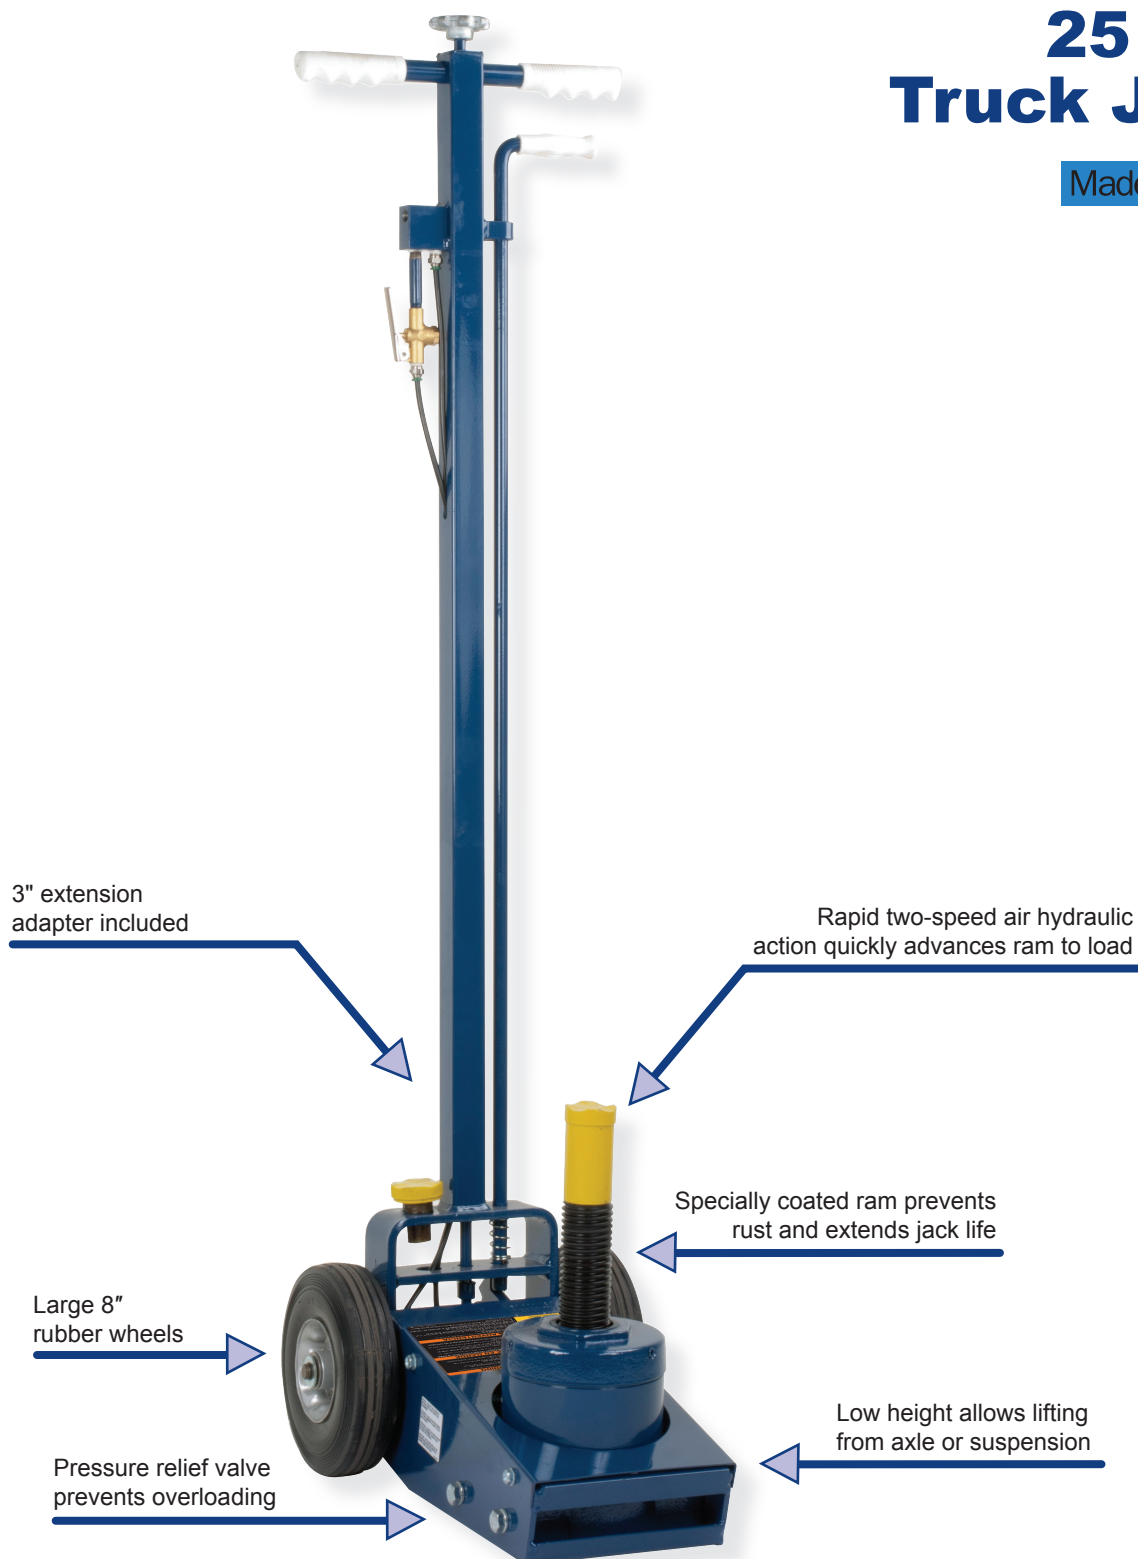
# HW93731 20 Ton Truck Jack

Made in 



| Model   | Capacity | Minimum Height | Maximum Height | Power Raise | Handle Length | Base Size       | Extension Screw | Operating Pressure | G.W.    |
|---------|----------|----------------|----------------|-------------|---------------|-----------------|-----------------|--------------------|---------|
| HW93731 | 20 Ton   | 9-3/8"         | 17-5/8"        | 5-1/2"      | 39-1/2"       | 8-3/4" x 5-1/2" | 2-3/4"          | 110-150 PSI        | 69 Lbs. |

# HW93735A 25 Ton Truck Jack

Made in 

| Model    | Capacity | Minimum Height | Maximum Height w/adaptor | Power Raise | Handle Length | Base Size | Extension Screw | Operating Pressure | G.W.     |
|----------|----------|----------------|--------------------------|-------------|---------------|-----------|-----------------|--------------------|----------|
| HW93735A | 25 Ton   | 8-1/4"         | 21-1/2"                  | 5-1/8"      | 53"           | 20" x 14" | 5-1/8"          | 110-200 PSI        | 118 Lbs. |